

## Ultrasonic sensor UB2000-F42S-I-V15




## Features

- Analogue output 4 mA ... 20 mA
- Extremely small unusable area
- TEACH-IN
- Interference suppression (adjustable width of sound cone in close range)
- Temperature compensation
- Synchronisation options
- Mode of operation adjustable

## Electrical connection

### Standard symbol/Connections: (version I)




Core colours in accordance with EN 60947-5-2.

## Connector V15



## Dimensions

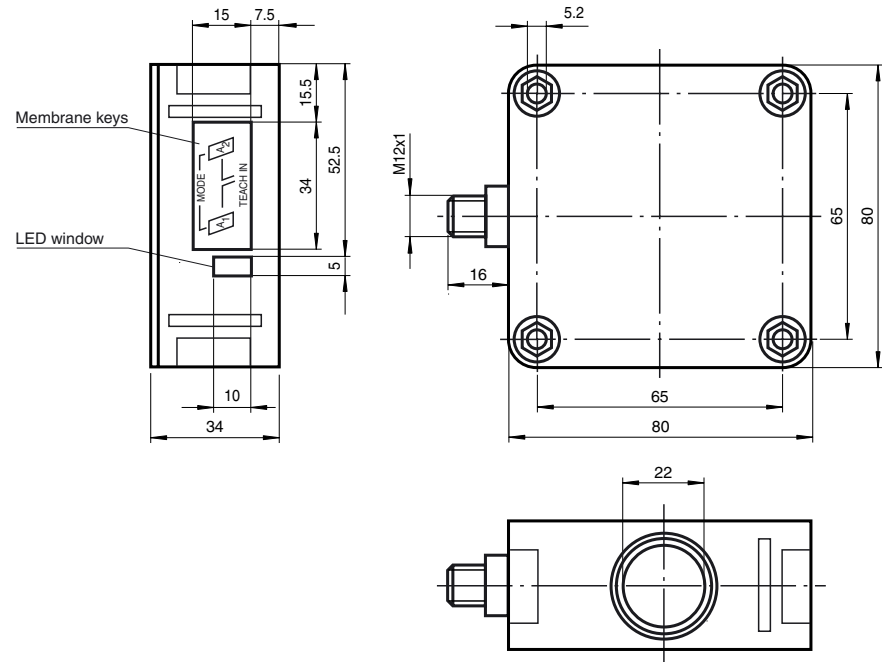

## Technical data



### General specifications

Sensing range	60 ... 2000 mm
Adjustment range	90 ... 2000 mm
Unusable area	0 ... 60 mm
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 175 kHz
Response delay	approx. 150 ms

### Indicators/operating means

LED green	permanently green: Power on
LED yellow	permanent: object in evaluation range
	flashing: TEACH-IN function
LED red	normal operation: "fault"
	TEACH-IN function: no object detected

### Electrical specifications

Operating voltage	10 ... 30 V DC, ripple 10 % <sub>SS</sub>
No-load supply current $I_0$	≤ 50 mA

### Input/Output

Synchronisation	bi-directional
	0 level: $-U_B \dots +1$ V
	1 level: $+4$ V $\dots +U_B$
	input impedance: > 12 KOhm
	synchronisation pulse: ≥ 100 µs, synchronisation interpulse period: ≥ 2 ms

### Synchronisation frequency

Common mode operation	≤ 30 Hz
Multiplex operation	≤ 30/n Hz, n = number of sensors

### Output

Output type	1 analogue output 4 ... 20 mA
Resolution	0.7 mm for max. detection range
Deviation of the characteristic curve	± 1 % of full-scale value
Repeat accuracy	± 0.1 % of full-scale value
Load impedance	0 ... 300 Ohm
Temperature influence	± 1 % of full-scale value

### Standard conformity

Standards	EN 60947-5-2
-----------	--------------

### Ambient conditions

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Storage temperature	-40 ... 85 °C (233 ... 358 K)

### Mechanical specifications

Protection degree	IP54
Connection	connector V15 (M12 x 1), 5 pin
Material	
Housing	PBT
Transducer	epoxy resin/hollow glass sphere mixture; foam polyurethane, cover PBT
Mass	140 g

**Parameterisation:**

You can use 2 keys to parameterise the sensor. In order to start the evaluation limit 1 learning mode, press the A1 key; in order to start the evaluation limit 2 learning mode, press the A2 key.

If you keep both keys pressed as you switch on the power supply, the sensor will switch over to the sensitivity adjustment mode of operation.

In case the parameterisation procedure is not completed within 5 minutes, the sensor will discontinue the process and retain all previous settings.

**Teaching in evaluation limits:**

Teaching in A1 evaluation limit by pressing the A1 key.

Keep A1 key pressed for > 2 s      The sensor enters the evaluation limit 1 learning mode

Position target object in the desired distance      The sensor indicates via LED lights whether the target object has been detected. In case the object has been detected, the yellow LED will flash; if the object has not been detected, the red LED flashes.

Briefly press the A1 key      The sensor completes the evaluation limit 1 TEACH-IN process and saves this value in non-volatile memory. In the event of an uncertain object (flashing red LED), the value learned is invalid. The system exits the TEACH-IN mode.


Analogously, the A2 evaluation limit is learned in the same fashion as described above using the A2 key.

**Suppression of disturbing targets**



Some types of installation or particular conditions during operation of an ultrasonic sensor may admit that undesired objects (such as shelf brow posts, edges of machines) are closer than the actual target as they enter the recording range. In this case, the sensor would normally detect these objects rather than the desired target. So in order to ensure an error-free operation, it may be necessary to suppress those objects.

Objects can be suppressed if they meet the following conditions:

- The disturbing target must not hide the actual target completely.
- The amplitude of the disturbing signal must be smaller than the amplitude of the desired signal.
- The disturbing target must remain in the edge region of the sound lobe and must not enter its center.

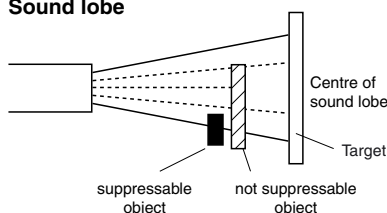**Sound lobe**

The suppression of the disturbing target is effected through reduction of the response sensitivity. This figure shows its effect on the response characteristics of the sensor. The sensor is preset on step 1 by the manufacturer.

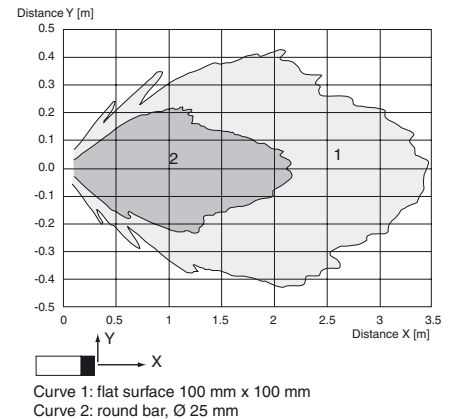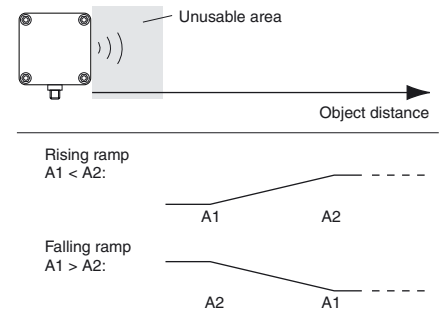**UB2000-F42S-I-V15****Characteristic curves/additional information****Characteristic response curve****Analogue output programming****Note:**

If A1 = A2, the output works like A1 < A2

**Accessories****Mounting aids**

MH 04-3505  
MHW 11


**Process indication and control unit**

DA5-IU-2K-V

**Cable sockets \*)**

V15-G-2M-PVC  
V15-W-2M-PUR

\*) For additional cable sockets see section „Accessories“.

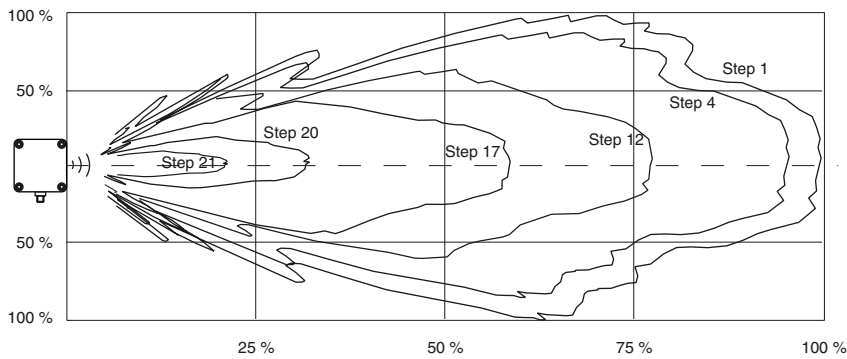

### Sensitivity adjustment for suppression of disturbing targets

Remove the actual target object from the detection range.

Keep A1 and A2 keys pressed as you switch on power supply

The sensor enters the sensitivity adjustment mode of operation.  
The sensor sensitivity can be adjusted in 24 steps.  
Step 1 = high response  
Step 24 = low response

Briefly press the A1 key

Response is increased. The LED lights indicate the actual state of the sensor.

- flashing red: no disturbing target detected
- flashing yellow: disturbing target detected
- permanent red: upper setting limit is reached.

Briefly press the A2 key

Response is decreased. The LED lights indicate the actual state of the sensor.

- flashing red: no disturbing target detected
- flashing yellow: disturbing target detected
- permanent red: lower setting limit is reached

Press both A1 and A2 keys at once

Exiting sensitivity adjustment. The sensor response is saved in non-volatile memory.  
In the event the sensitivity adjustment is not exited through this procedure, the sensor will exit this operation mode automatically after 5 minutes, and the previous sensitivity value remains valid.

### Synchronisation

In order to prevent conflicts, the sensor is equipped with a synchronisation connection. In case this is unwired, the sensor function is based on an intern clock rate. Several sensors can be synchronised through the following methods:

#### External synchronisation:

The sensor can be synchronised by application of external square wave voltage. A synchronising pulse at the synchronisation input triggers a measuring cycle. The pulse width needs to be bigger than 100 µs. The measuring cycle is started with the falling edge. A low level > 1 s or an open synchronisation input causes the sensor to operate at normal operating mode. A high level at the synchronisation input deactivates the sensor.

There are two possible operation modes:

- Several sensors are controlled by the same synchronisation signal. The sensors function in common mode.
- The respective synchronising pulses are directed to just one sensor each cyclically. The sensors function in multiplex mode.

#### Self synchronisation:

The synchronisation connections of up to 5 sensors offering a self synchronisation option are interconnected. After switching on power supply, these sensors function in the multiplex mode. The response delay increases according to the number of sensors to be synchronised. During the TEACH-IN process no synchronisation can be performed and vice versa. For teaching in switch points, the sensors need to be operated in an unsynchronised state.

#### Note:

If the option for synchronisation is not used, the synchronisation input has to be connected to ground (0 V) or the sensor has to be operated via a V1 cable connector (4-pin).