


BAW M12ME-UAC20B-S04G
Inductive Distance Sensors

0,5...2 mm
0...10 V

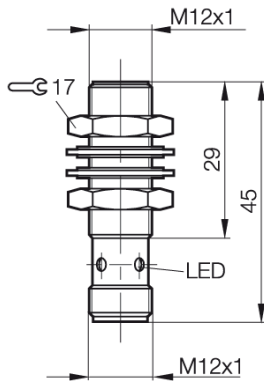

41748

Electrical data:

Connection	connector
Rated operational voltage DC	24 V
Rated insulation voltage (Ui)	250 AC
Electrical type	DC
No-load supply current I _o at I _e	10 mA
Supply voltage ripple	15 %
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	15 V
Output voltage s _l max	10 V
Output voltage s _l min	0 V
Cutoff frequency (-3dB output amplitude)	500 Hz
Load resistance min (R _L)	2000 Ohm
Output voltage at s _e	5 V
Linear range max (s _l)	2 mm
Linear range min (s _l)	0,5 mm
Non-linearity	±45 µm
Output signal	0...10 V


General data:

Supply voltage indicator	no
Degree of protection IP	IP 67
Insulation class	2
Recommended connector	BKS-_19/BKS-_20
Polarity reversal resistant	yes
Protected against reversal	yes

Mechanical data:

Midpoint of linear range (s _e)	1,25 mm
Connection type	M12x1-S04
Mounting	flush mountable
Surface treatment	nickel plated
Temperature drift max.	5 %
Ambient temperature max (T _a)	70 °C
Ambient temperature min (T _a)	-10 °C
Sensing face material	PBT
Housing material	CuZn
Repeatability	3 %
Working area max (s _a)	2 mm
Working area min (s _a)	0,5 mm
Time delay before available max	0,5 ms
Measurement velocity	40 m/s
Opt. working temperature max.	50 °C
Opt. working temperature min.	10 °C
Temperature coefficient max.	-1,0 µm/K
Temperature coefficient min.	1,5 µm/K
Temperature coefficient typ.	0,0 µm/K
Repeat accuracy	±20,0 µm
Adjustment indicator	yes
Working range	0,5...2 mm

Wiring:



Pinout:

