

## Ultrasonic sensor UB300-18GM40-I-V1




## Features

- Short design, 40 mm
- Function indicators visible from all directions
- Analogue output 4 mA ... 20 mA
- Measuring window adjustable
- TEACH-IN input
- Temperature compensation

## Electrical connection

Standard symbol/Connections:  
(version I)




Core colours in accordance with EN 60947-5-2.

## Connector V1



## Dimensions

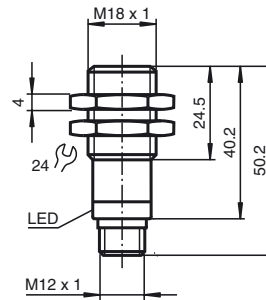

## Technical data



### General specifications

Sensing range	30 ... 300 mm
Adjustment range	50 ... 300 mm
Unusable area	0 ... 30 mm
Standard target plate	100 mm x 100 mm
Transducer frequency	approx. 390 kHz
Response delay	approx. 30 ms

### Indicators/operating means

LED yellow	permanently yellow: object in the evaluation range yellow, flashing: TEACH-IN function, object detected
LED red	permanently red: Error red, flashing: TEACH-IN function, object not detected

### Electrical specifications

Operating voltage	10 ... 30 V DC , ripple 10 % <sub>SS</sub>
No-load supply current I <sub>0</sub>	≤ 20 mA

### Input

Input type	1 TEACH-IN input lower evaluation limit A1: -U <sub>B</sub> ... +1 V, upper evaluation limit A2: +4 V ... +U <sub>B</sub> input impedance: > 4.7 kΩ, pulse duration: ≥ 1 s
------------	--

### Output

Output type	1 analogue output 4 ... 20 mA, short-circuit/overload protected
Default setting	evaluation limit 1: 50 mm evaluation limit 2: 300 mm
Resolution	0.4 mm at max. sensing range

Deviation of the characteristic curve	± 1 % of full-scale value
---------------------------------------	---------------------------

Repeat accuracy	± 0.5 % of full-scale value
-----------------	-----------------------------

Load impedance	0 ... 300 Ohm
----------------	---------------

Temperature influence	± 1.5 % of full-scale value
-----------------------	-----------------------------

### Standard conformity

Standards	EN 60947-5-2
-----------	--------------

### Ambient conditions

Ambient temperature	-25 ... 70 °C (248 ... 343 K)
Storage temperature	-40 ... 85 °C (233 ... 358 K)

### Mechanical specifications

Protection degree	IP65
Connection	V1 connector (M12 x 1), 4-pin
Material	
Housing	brass, nickel-plated
Transducer	epoxy resin/hollow glass sphere mixture; foam polyurethane, cover PBT
Mass	25 g

### Adjusting the evaluation limits

The ultrasonic sensor features an analogue output with two teachable evaluation limits. These are set by applying the supply voltage  $-U_B$  or  $+U_B$  to the TEACH-IN input. The supply voltage must be applied to the TEACH-IN input for at least 1 s. LEDs indicate whether the sensor has recognised the target during the TEACH-IN procedure. The lower evaluation limit A1 is taught with  $-U_B$ , A2 with  $+U_B$ .

Two different output functions can be set:

1. Analogue value increases with rising distance to object (rising ramp)
2. Analogue value falls with rising distance to object (falling ramp)

### TEACH-IN rising ramp (A2 > A1)

- Position object at lower evaluation limit
- TEACH-IN lower limit A1 with  $-U_B$
- Position object at upper evaluation limit
- TEACH-IN upper limit A2 with  $+U_B$

### TEACH-IN falling ramp (A1 > A2):

- Position object at lower evaluation limit
- TEACH-IN lower limit A2 with  $+U_B$
- Position object at upper evaluation limit
- TEACH-IN upper limit A1 with  $-U_B$

### Default setting

A1: unusable area  
 A2: nominal sensing range  
 Mode of operation: rising ramp

### LED Displays

Displays in dependence on operating mode	Red LED	Yellow LED
<b>TEACH-IN evaluation limit</b>		
Object detected	off	flashes
No object detected	flashes	off
Object uncertain (TEACH-IN invalid)	on	off
Normal mode (evaluation range)	off	on
Fault	on	previous state

### Installation conditions


If the sensor is installed at places, where the environment temperature can fall below  $0\text{ }^{\circ}\text{C}$ , for the sensors fixation, one of the mounting flanges BF18, BF18-F or BF 5-30 must be used.

In case of direct mounting of the sensor in a through hole using the steel nuts, it has to be fixed at the middle of the housing thread. If a fixation at the front end of the threaded housing is required, plastic nuts with centering ring (accessories) must be used.


## UB300-18GM40-I-V1

### Characteristic curves/additional information

#### Characteristic response curve

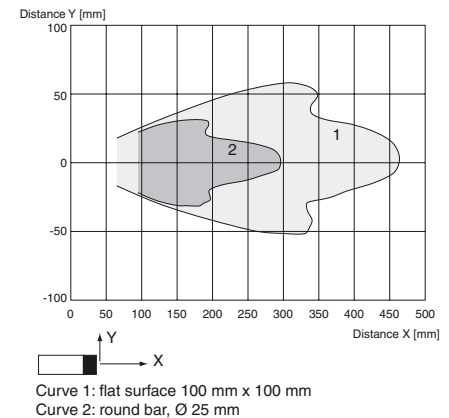

#### Programmed analogue output function

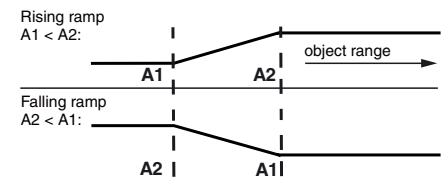

### Accessories

#### Programming device

UB-PROG2

#### Mounting aids/fixing flanges

OMH-04

BF 18

BF 18F

BF 5-30

#### Sound deflector

UVW90-K18

#### Cable sockets<sup>\*)</sup>

V1-G-2M-PVC

V1-W-2M-PUR

<sup>\*)</sup> For additional cable sockets see section „Accessories“.