


BES 515-326-S 4-C
BES02EU

PNP
NO
flush mountable

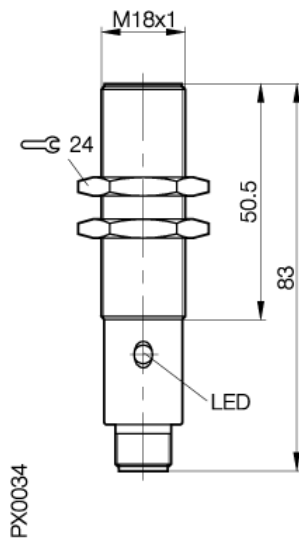

Electrical data:

Time delay before availability	10 ms
Hysteresis max (H)	15 %
Switching output	PNP
Utilization category	DC 13
No-load supply current damped	= 12 mA
Voltage drop max. static	1,5 V
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Switching element function	NO
Operating frequency (f)	900 Hz
Connection	Connector S4 (M12)
Electrical type	DC
Off-state current max (Ir)	10 µA
Ripple max. of Ue	= 15 %
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V

Mechanical data:

Ambient temperature max	+85 °C
Mounting	flush mountable
Ambient temperature min	-40 °C
Degree of pollution	3
Number of Wires	3-wire
Assured operating distance	0...4,0 mm
Sensing face material	PA 12
Housing material	corrosion resistance Steel
Rated operating distance (sn)	5 mm
Diameter	M18x1 mm
Repeat accuracy max. (R)	5 %

General data:

Insulation class	2
Brand	Proxinox
Approval	CE,ULZ1
Output indication	yes
Short circuit protected	yes
Protected against polarity reversal	yes
Degree of protection IP	IP68 per BWN Pr 20

Wiring:



Pinout:

