


BES 515-327-BO-C-PU-15

PNP
NO
flush mountable

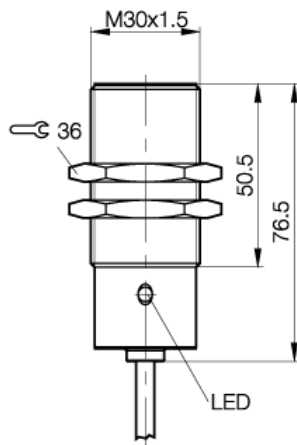

PX0023

Electrical data:

Electrical type	DC
No-load supply current undamped	12 mA
Off-state current max. (Ir)	80 μ A
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V
Connection	Cable
Utilization category	DC 13
Switching output	PNP
Switching element function	NO
No-load supply current damped	= 25 mA
Operating frequency (f)	300 Hz
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA

Mechanical data:

Sensing face material	PA 12
Number of wires	3-wire
Mounting	flush mountable
Housing material	1.4305
Rated operating distance (sn)	10 mm
Assured operating distance	0...8,1 mm
Repeat accuracy max. (R)	5 %
Diameter	M30x1.5 mm
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C

General data:

Output indication	yes
Short circuit protected	yes
Approval	CE
Protected against polarity reversal	yes
Degree of protection IP	IP68 per BWN Pr 20

Wiring:

