


BES 516-105-BO-C-PU-05
BES015L

PNP
NO/NC
flush mountable

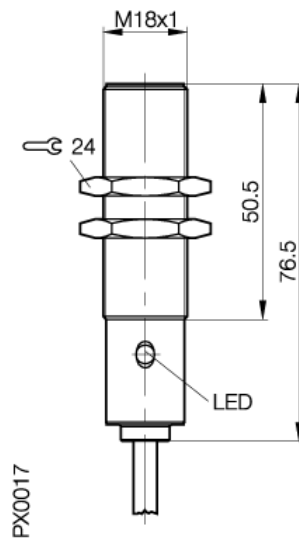

Electrical data:

Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Utilization category	DC 13
Hysteresis max (H)	15 %
Switching output	PNP
Switching element function	NO/NC
Off-state current max (Ir)	80 µA
Operating frequency (f)	500 Hz
Voltage drop max. static	2,5 V
Connection	Cable
Electrical type	DC
Ripple max. of Ue	= 15 %
Time delay before availability	10 ms
No-load supply current damped	= 30 mA
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V

Mechanical data:

Number of wires	4-wire
Assured operating distance	0...4,0 mm
Rated operating distance (sn)	5 mm
Mounting	flush mountable
Sensing face material	PA 12
Housing material	CuZn, nickel plated
Diameter	M18x1 mm
Cable code designation	LiY-Y-11Y-O
Ambient temperature max	+70 °C
Repeat accuracy max. (R)	5 %
Ambient temperature min	-25 °C
Degree of pollution	3

General data:

Short circuit protected	yes
Insulation class	2
Protected against polarity reversal	yes
Output indication	yes
Approval	CE,c_ul_us
Degree of protection IP	IP67

Wiring:

