


BES 516-300-S180-02
BES0185

PNP
NC
flush mountable

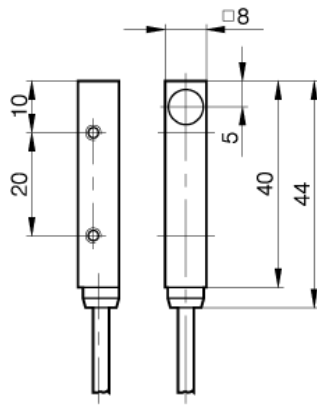

PX0328

Electrical data:

Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Operating frequency (f)	5000 Hz
Voltage drop max. static	2,5 V
Time delay before availability	10 ms
Utilization category	DC 13
Hysteresis max (H)	15 %
Switching output	PNP
Switching element function	NC
Ripple max. of Ue	= 15 %
Connection	Cable
Electrical type	DC
No-load supply current damped	= 4 mA
No-load supply current undamped	12 mA
Off-state current max (Ir)	80 µA
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V

Mechanical data:

Number of wires	3-wire
Cable code designation	LiYY-O
Ambient temperature max	+70 °C
Repeat accuracy max. (R)	5 %
Assured operating distance	0...1,2 mm
Mounting	flush mountable
Sensing face material	POM
Housing material	Gd Zn Al
Rated operating distance (sn)	1,5 mm
Ambient temperature min	-25 °C
Degree of pollution	3

General data:

Short circuit protected	yes
Approval	CE,c_ul_us
Protected against polarity reversal	yes
Degree of protection IP	IP67

Wiring:

