


BES 516-3021-G-E4-C-PU-05
BES00KT

PNP
NC
flush mountable

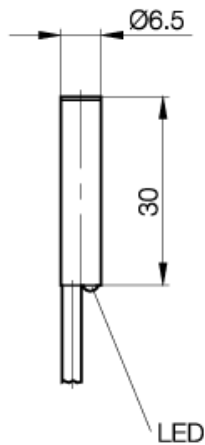

PX2023

Electrical data:

Time delay before availability	20 ms
No-load supply current damped	3 mA
No-load supply current undamped	9 mA
Off-state current max. (I _r)	20 µA
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Connection	Cable
Rated operational voltage (U _e)	24 DC V
Utilization category	DC 13
Hysteresis max (H)	15 %
Ripple max. of U _e	= 15 %
Electrical type	DC
Switching output	PNP
Switching element function	NC
Load current capacity (I _e)	200 mA
Operating frequency (f)	1500 Hz
Voltage drop max. static	2,5 V

Mechanical data:

Assured operating distance	0...1,6 mm
Mounting	flush mountable
Ambient temperature min	-25 °C
Degree of pollution	3
Number of wires	3-wire
Cable code designation	LIFY-11Y-O
Ambient temperature max	+70 °C
Repeat accuracy max. (R)	5 %
Rated operating distance (sn)	2 mm
Diameter	6,5 mm
Sensing face material	PA 12
Housing material	corrosion resistance Steel

General data:

Short circuit protected	yes
Degree of protection IP	IP68 per BWN Pr 20
Protected against polarity reversal	yes
Output indication	yes
Approval	CE,c_ul_us

Wiring:

