


BES 516-3026-BO-C-02
BES018Z

PNP
NC
non flush mountable

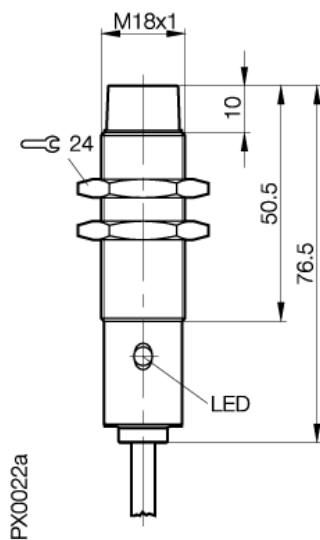

Electrical data:

Connection	Cable
Electrical type	DC
Off-state current max. (I _r)	10 µA
Ripple max. of U _e	= 15 %
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Load current capacity (I _e)	200 mA
No-load supply current damped	= 4 mA
Operating frequency (f)	600 Hz
Voltage drop max. static	1,5 V
Rated operational voltage (U _e)	24 DC V
Utilization category	DC 13
Hysteresis max. (H)	15 %
Switching output	PNP
Switching element function	NC
Time delay before availability	10 ms

Mechanical data:

Ambient temperature min	-25 °C
Degree of pollution	3
Rated operating distance (s _n)	8 mm
Diameter	M18x1 mm
Repeat accuracy max. (R)	5 %
Number of wires	3-wire
Cable code designation	LiYY-O
Ambient temperature max	+70 °C
Assured operating distance	0...6,5 mm
Mounting	non flush mountable
Sensing face material	PA 12
Housing material	CuZn, nickel plated

General data:

Degree of protection IP	IP68 per BWN Pr 20
Output indication	yes
Approval	CE,c_ul_us
Short circuit protected	yes
Insulation class	2
Protected against polarity reversal	yes

Wiring:

