


BES 516-3028-G-E4-Y-S 4

Inductive Sensors

PNP

NC

flush mountable

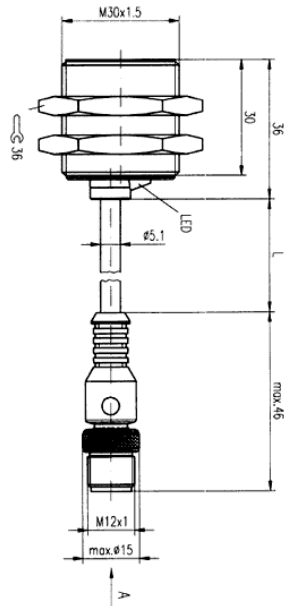

Electrical data:

Connection	cable with connector
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	130 mA
Time delay before availability	10 ms
Electrical type	DC
Utilization category	DC 13
Hysteresis max (H)	15 %
No-load supply current damped	= 12 mA
Off-state current max (Ir)	80 µA
Ripple max. of Ue	= 15 %
Switching output	PNP
Switching element function	NC
Operating frequency (f)	100 Hz
Voltage drop max. static	3,5 V
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V

Mechanical data:

Number of Wires	3-wire
Tightening torque	70 Nm
Rated operating distance (sn)	15 mm
Diameter	M30x1.5 mm
Assured operating distance	0...12,0 mm
Mounting	flush mountable
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Degree of pollution	3
Sensing face material	PA 12
Housing material	CuZn, nickel plated
Repeat accuracy max. (R)	= 5 %

General data:

Output indication	yes
Short circuit protected	yes
Degree of protection IP	IP68 per BWN Pr 20
Protected against polarity reversal	yes
Approval	CE, c_ul_us

wiring



Pinout

