


BES 516-324-EO-C-02
BES01A7

PNP
NO
flush mountable

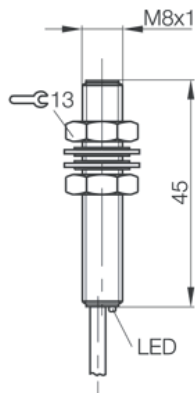

PX2010

Electrical data:

Electrical type	DC
Off-state current max (I _r)	20 µA
Ripple max. of U _e	= 15 %
Time delay before availability	20 ms
No-load supply current damped	9 mA
No-load supply current undamped	3 mA
Operating frequency (f)	3000 Hz
Voltage drop max. static	2,5 V
Load current capacity (I _e)	200 mA
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Connection	Cable
Rated operational voltage (U _e)	24 DC V
Utilization category	DC 13
Hysteresis max (H)	15 %
Switching output	PNP
Switching element function	NO

Mechanical data:

Assured operating distance	0...1,2 mm
Mounting	flush mountable
Rated operating distance (s _n)	1,5 mm
Diameter	M8x1 mm
Ambient temperature min	-25 °C
Degree of pollution	3
Sensing face material	PA 12
Housing material	corrosion resistance Steel
Number of wires	3-wire
Cable code designation	LiYY-O
Ambient temperature max	+70 °C
Repeat accuracy max. (R)	5 %

General data:

Short circuit protected	yes
Degree of protection IP	IP68 per BWN Pr 20
Insulation class	2
Protected against polarity reversal	yes
Output indication	yes
Approval	CE,c_ul_us

Wiring:

