


BES 516-325-E4-C-PU-03
BES00PC

PNP
NO
flush mountable

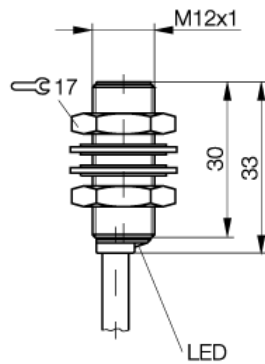

PX1247

Electrical data:

Load current capacity (I _e)	200 mA
No-load supply current damped	= 10 mA
Operating frequency (f)	5000 Hz
Voltage drop max. static	2 V
Rated operational voltage (U _e)	24 DC V
Utilization category	DC 13
Hysteresis max (H)	15 %
Switching output	PNP
Switching element function	NO
Connection	Cable
Electrical type	DC
Off-state current max (I _r)	30 µA
Ripple max. of U _e	= 15 %
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Time delay before availability	15 ms

Mechanical data:

Rated operating distance (s _n)	2 mm
Diameter	M12x1 mm
Ambient temperature min	-25 °C
Degree of pollution	3
Number of wires	3-wire
Cable code designation	LifY-Y-11Y-O
Ambient temperature max	+70 °C
Repeat accuracy max. (R)	5 %
Assured operating distance	0...1,6 mm
Mounting	flush mountable
Sensing face material	PBTP
Housing material	CuZn, nickel plated

General data:

Approval	CE, ULZ1
Output indication	yes
Short circuit protected	yes
Protected against polarity reversal	yes
Degree of protection IP	IP68 per BWN Pr 20

Wiring:

