


BES 516-325-G-E4-C-03
BES00PM

PNP
NO
flush mountable

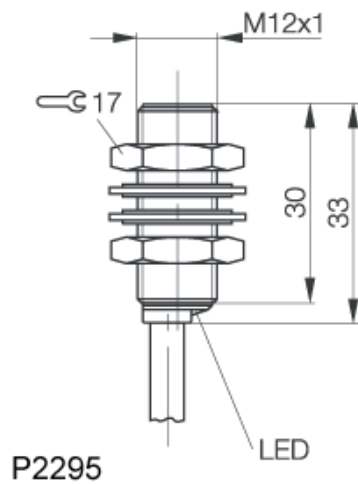

Electrical data:

Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Utilization category	DC 13
Hysteresis max (H)	15 %
Switching output	PNP
Switching element function	NO
Connection	Cable
Electrical type	DC
Off-state current max (Ir)	10 µA
Ripple max. of Ue	= 15 %
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V
Time delay before availability	20 ms
No-load supply current damped	10 mA
No-load supply current undamped	3 mA
Operating frequency (f)	2500 Hz
Voltage drop max. static	2,5 V

Mechanical data:

Cable code designation	LiYY-O
Ambient temperature min	-25 °C
Degree of pollution	3
Number of wires	3-wire
Assured operating distance	0...3,2 mm
Mounting	flush mountable
Sensing face material	LCP
Housing material	CuZn, Ni free coated
Rated operating distance (sn)	4 mm
Diameter	M12x1 mm
Ambient temperature max	+70 °C
Repeat accuracy max. (R)	5 %

General data:

Approval	CE,c_ul_us
Degree of protection IP	IP68 per BWN Pr 20
Output indication	yes
Short circuit protected	yes
Insulation class	2
Protected against polarity reversal	yes

Wiring:

