


BES 516-343-G-E5-C-S49
BES00TY

NPN
NO
flush mountable

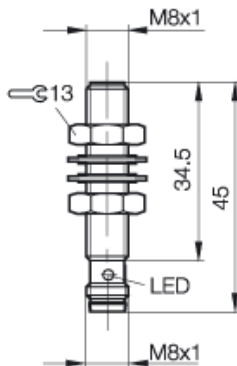

PX2009

Electrical data:

Load current capacity (I _e)	200 mA
Off-state current max (I _r)	20 µA
Ripple max. of U _e	= 15 %
Supply voltage max. (U _b)	30 V
Rated operational voltage (U _e)	24 DC V
Utilization category	DC 13
Hysteresis max (H)	15 %
Switching output	NPN
Supply voltage min. (U _b)	10 V
Connection	Connector S49 (M8)
Electrical type	DC
No-load supply current damped	= 11 mA
No-load supply current undamped	3 mA
Operating frequency (f)	1500 Hz
Voltage drop max. static	2,5 V
Time delay before availability	20 ms
Switching element function	NO

Mechanical data:

Diameter	M8x1 mm
Housing material	corrosion resistance Steel
Repeat accuracy max. (R)	5 %
Rated operating distance (s _n)	2 mm
Ambient temperature max	+70 °C
Number of Wires	3-wire
Assured operating distance	0...1,6 mm
Sensing face material	PA 12
Mounting	flush mountable
Ambient temperature min	-25 °C
Degree of pollution	3

General data:

Degree of protection IP	IP68 per BWN Pr 20
Output indication	yes
Short circuit protected	yes
Protected against polarity reversal	yes
Approval	CE,c_ul_us

Wiring:



Pinout:

