


BES 516-361-E4-Y-03
BES00WP

NPN
NO
non flush mountable

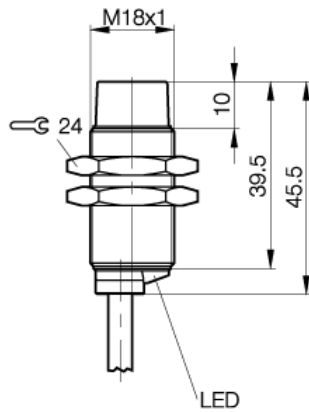

PX0372

Electrical data:

Time delay before availability	60 ms
No-load supply current damped	= 25 mA
Operating frequency (f)	200 Hz
Voltage drop max. static	3,5 V
Connection	Cable
Electrical type	DC
Off-state current max (I _r)	80 µA
Ripple max. of U _e	= 15 %
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Load current capacity (I _e)	130 mA
Hysteresis max (H)	15 %
Switching element function	NO
Rated operational voltage (U _e)	24 DC V
Utilization category	DC 13
Switching output	NPN

Mechanical data:

Rated operating distance (s _n)	8 mm
Assured operating distance	0...6,5 mm
Cable code designation	LiYY-O
Repeat accuracy max. (R)	5 %
Diameter	M18x1 mm
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Degree of pollution	3
Number of wires	3-wire
Mounting	non flush mountable
Sensing face material	PA 12
Housing material	CuZn, nickel plated

General data:

Approval	CE,ULZ1
Output indication	yes
Short circuit protected	yes
Degree of protection IP	IP68 per BWN Pr 20
Insulation class	2
Protected against polarity reversal	yes

Wiring:

