


BES 516-362-S 4-CW
BES02JT

PNP
NO
non flush mountable

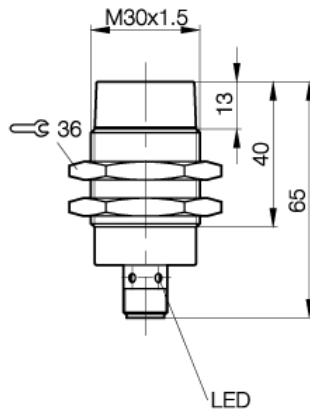

PX0108

Electrical data:

Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	= 12 mA
Operating frequency (f)	20 Hz
Voltage drop max. static	2,5 V
Load current capacity (I _e)	200 mA
Off-state current max (I _r)	80 µA
Ripple max. of U _e	= 15 %
Supply voltage max. (U _b)	30 V
Rated operational voltage (U _e)	24 DC V
Switching element function	NO
Time delay before availability	80 ms
Utilization category	DC 13
Hysteresis max (H)	15 %
Switching output	PNP
Supply voltage min. (U _b)	10 V

Mechanical data:

Number of Wires	3-wire
Assured operating distance	0...12,2 mm
Sensing face material	PTFE
Mounting	non flush mountable
Ambient temperature min	-25 °C
Degree of pollution	3
Diameter	M30x1.5 mm
Housing material	CuZn, PTFE coated
Repeat accuracy max. (R)	5 %
Rated operating distance (sn)	15 mm
Ambient temperature max	+70 °C

General data:

Output indication	yes
Short circuit protected	yes
Protected against polarity reversal	yes
Approval	CE,ULZ1
Degree of protection IP	IP67
Features	magnetic field immune

Wiring:



Pinout:

