


BES 516-370-BO-C-PU-05
BES01K5

PNP
NC
flush mountable

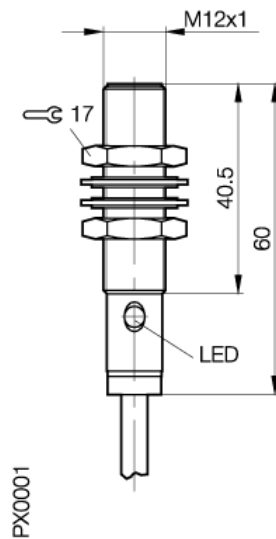

Electrical data:

Time delay before availability	10 ms
No-load supply current damped	= 1 mA
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Connection	Cable
Electrical type	DC
Switching output	PNP
Switching element function	NC
Utilization category	DC 13
Off-state current max (I _r)	10 µA
Ripple max. of U _e	= 15 %
Rated operational voltage (U _e)	24 DC V
Load current capacity (I _e)	200 mA
Hysteresis max (H)	15 %
Operating frequency (f)	3000 Hz
Voltage drop max. static	1,5 V

Mechanical data:

Sensing face material	PA 12
Housing material	corrosion resistance Steel
Number of wires	3-wire
Mounting	flush mountable
Diameter	M12x1 mm
Assured operating distance	0...1,6 mm
Cable code designation	LifY-Y-11Y-O
Repeat accuracy max. (R)	5 %
Tightening torque	20 Nm
Rated operating distance (sn)	2 mm
Ambient temperature max	+85 °C
Ambient temperature min	-40 °C
Degree of pollution	3

General data:

Degree of protection IP	IP68 per BWN Pr 20
Output indication	yes
Short circuit protected	yes
Approval	CE,c_ul_us
Insulation class	2
Protected against polarity reversal	yes

Wiring:

