


BES 516-377-E5-C-S4

PNP
NC
flush mountable

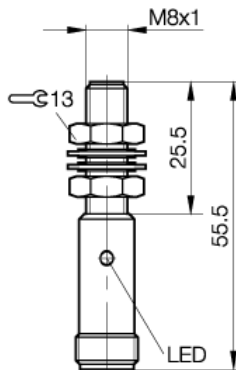

PX0202

Electrical data:

Time delay before availability	10 ms
Switching element function	NC
Rated operational voltage (Ue)	24 DC V
Utilization category	DC 13
Hysteresis max (H)	15 %
Switching output	PNP
Supply voltage min. (Ub)	10 V
Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	= 8 mA
Operating frequency (f)	1500 Hz
Voltage drop max. static	2,5 V
Load current capacity (Ie)	200 mA
Off-state current max (I _r)	80 µA
Ripple max. of Ue	= 15 %
Supply voltage max. (Ub)	30 V


Mechanical data:

Mounting	flush mountable
Ambient temperature min	-25 °C
Degree of pollution	3
Rated operating distance (sn)	1,5 mm
Ambient temperature max	+70 °C
Tightening torque	5 Nm
Assured operating distance	0...1,2 mm
Sensing face material	PBTP
Diameter	M8x1 mm
Housing material	corrosion resistance Steel
Repeat accuracy max. (R)	5 %

General data:

Approval	CE,c_ul_us
Output indication	yes
Short circuit protected	yes
Protected against polarity reversal	yes
Degree of protection IP	IP67

Wiring:



Pinout:

