


BES 516-383-EO-C-PU-03
BES01M4

PNP
NO
non flush mountable

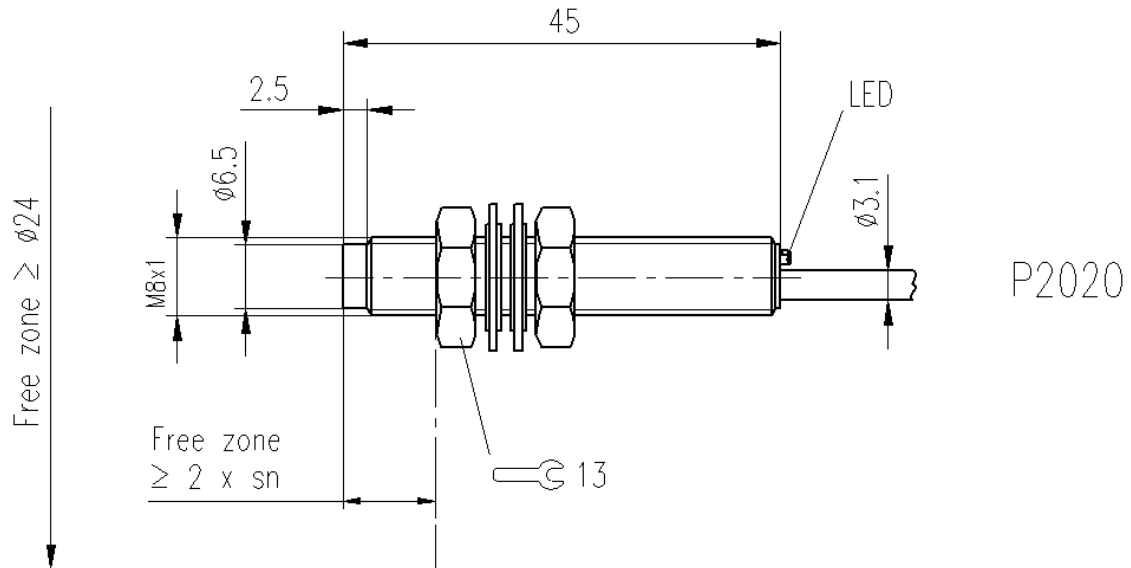


Electrical data:

No-load supply current undamped	3 mA
Off-state current max (Ir)	20 µA
Ripple max. of Ue	= 15 %
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V
Time delay before availability	20 ms
Hysteresis max (H)	15 %
Switching element function	NO
Connection	Cable
Electrical type	DC
Switching output	PNP
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Utilization category	DC 13
No-load supply current damped	9 mA
Operating frequency (f)	2000 Hz
Voltage drop max. static	2,5 V

General data:

Degree of protection IP	IP68 per BWN Pr 20
Approval	CE, c_ul_us
Output indication	yes
Short circuit protected	yes
Insulation class	2
Protected against polarity reversal	yes

Wiring:



Mechanical data:

Number of wires	3-wire
Mounting	non flush mountable
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Degree of pollution	3
Diameter	M8x1 mm
Assured operating distance	0...2,0 mm
Cable code designation	LIFY-11Y-O
Rated operating distance (sn)	2,5 mm
Sensing face material	PA 12
Housing material	corrosion resistance Steel
Repeat accuracy max. (R)	5 %