


BES 517-139-M4-H-S 4

PNP
NO/NC
flush mountable

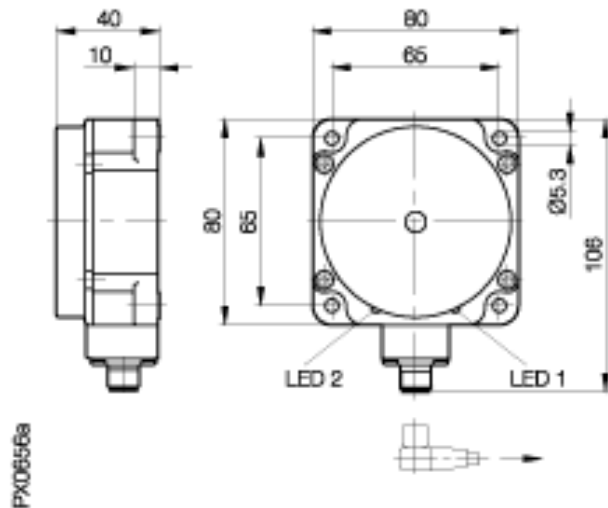

Electrical data:

Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	= 15 mA
Operating frequency (f)	50 Hz
Voltage drop max. static	2,5 V
Time delay before availability	10 ms
Switching element function	NO/NC
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Off-state current max (Ir)	80 µA
Supply voltage max. (Ub)	55 V
Supply voltage min. (Ub)	10 V
Utilization category	DC 13
Hysteresis max (H)	20 %
Ripple max. of Ue	= 15 %
Switching output	PNP


Mechanical data:

Number of Wires	4-wire
Assured operating distance	0...30,6 mm
Sensing face material	PBTP
Mounting	flush mountable
Ambient temperature min	-15 °C
Degree of pollution	3
Rated operating distance (sn)	40 mm
Housing material	PBTP
Repeat accuracy max. (R)	5 %
Ambient temperature max	+70 °C

General data:

Output indication	yes
Short circuit protected	yes
Protected against polarity reversal	yes
Brand	Maxisensor
Degree of protection IP	IP67
Approval	CE
Power Indication	yes

Wiring:



Pinout:

