


conductive
non flush mountable

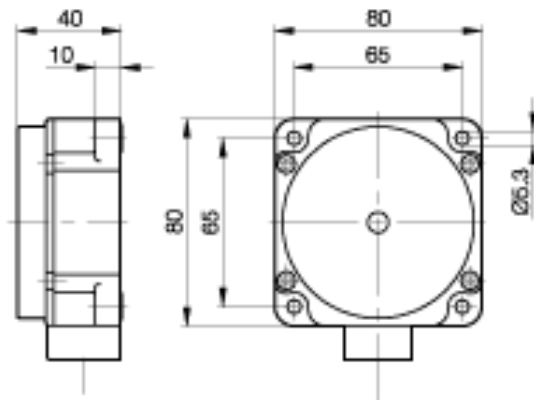

PX00847

Electrical data:

Connection	Screw terminals
Rated operational voltage DC	8.2 DC V
Time delay before availability	10 ms
Electrical type	DC
Hysteresis max (H)	10 %
Ripple of power supply	15 %
Switching element function	conductive
Operating frequency (f)	50 Hz
Supply voltage min DC (UB)	7,7 V

Mechanical data:

Rated operating distance (sn)	50 mm
Assured operating distance	0...40 mm
Mounting	non flush mountable
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Degree of pollution	3
Sensing face material	PBTP
Housing material	PBTP
Repeat accuracy max. (R)	5 %

General data:

Brand	Maxisensor
Degree of protection IP	IP67
Approval	CE

Wiring: