


BES 517-398-NO-C-PU-03
BES01N8

PNP
NO
flush mountable

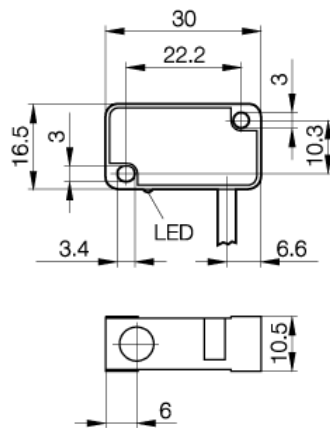

PX0731

Electrical data:

Time delay before availability	50 ms
No-load supply current damped	= 10 mA
Operating frequency (f)	2500 Hz
Voltage drop max. static	2 V
Rated operational voltage (U _e)	24 DC V
Utilization category	DC 13
Switching output	PNP
Switching element function	NO
Connection	Cable
Electrical type	DC
No-load supply current undamped	3 mA
Off-state current max. (I _r)	80 µA
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Load current capacity (I _e)	200 mA
Hysteresis max. (H)	15 %
Ripple max. of U _e	= 15 %

Mechanical data:

Number of wires	3-wire
Rated operating distance (sn)	2 mm
Assured operating distance	0...1,6 mm
Cable code designation	LifY-Y-11Y-O
Mounting	flush mountable
Housing material	PBTP 20%GV
Degree of pollution	3
Sensing face material	PBTP 20%GV
Repeat accuracy max. (R)	5 %
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C

General data:

Output indication	yes
Short circuit protected	yes
Brand	Minisensor
Degree of protection IP	IP65
Protected against polarity reversal	yes
Approval	CE

Wiring:

