


BES G06EA-NSD15B-S49G
BES025F

NPN
NO
flush mountable

CH0174a

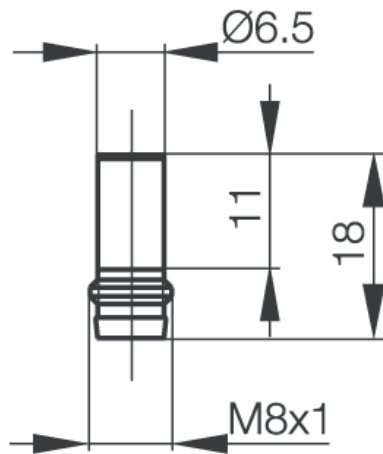

Electrical data:

Time delay before availability	20 ms
Hysteresis max (H)	15 %
Load capacitance max	0,2 µF
Switching output	NPN
Switching element function	NO
Connection	Connector S49 (M8)
Electrical type	DC
No-load supply current undamped	3 mA
Off-state current max (I _r)	10 µA
Voltage drop max. static	2,5 V
Supply voltage max. (U _b)	30 V
Load current capacity (I _e)	150 mA
No-load supply current damped	14 mA
Operating frequency (f)	3000 Hz
Rated operational voltage (U _e)	24 DC V
Utilization category	DC 13
Ripple max. of U _e	10 %
Supply voltage min. (U _b)	10 V


Mechanical data:

Ambient temperature max	+70 °C
Rated operating distance (s _n)	1,5 mm
Assured operating distance	0...1,2 mm
Housing material	corrosion resistance Steel
Repeat accuracy max. (R)	5 %
Number of Wires	3-wire
Mounting	flush mountable
Degree of pollution	3
Sensing face material	POM
Diameter	6,5 mm
Ambient temperature min	-25 °C

General data:

Brand	SuperShorties
Degree of protection IP	IP67
Protected against polarity reversal	yes
Short circuit protected	yes
Approval	CE,c_ul_us

Wiring:



Pinout:

