


BES K06K60-POC15B-EP02
BES026E

PNP
NC
flush mountable

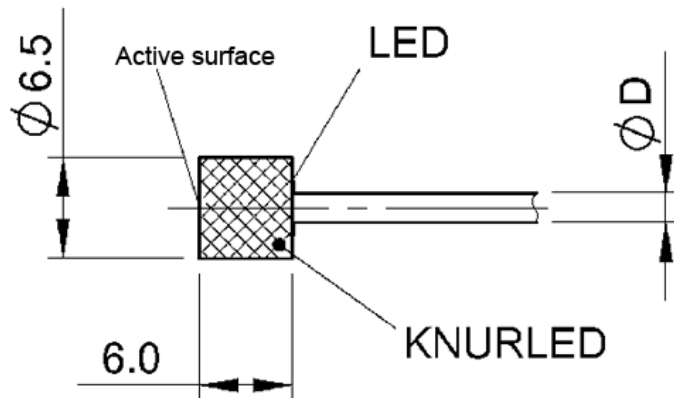

Electrical data:

Output resistance (Ra)	open collector
Utilization category	DC 13
Switching output	PNP
Switching element function	NC
Rated insulation voltage (Ui)	75 DC
Time delay before availability	20 ms
Load capacitance max	0,2 µF
No-load supply current damped	3 mA
Operating frequency (f)	3000 Hz
Voltage drop max. static	2,5 V
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	150 mA
Hysteresis max (H)	15 %
Ripple max. of Ue	10 %
Connection	Cable
Electrical type	DC
No-load supply current undamped	9 mA
Off-state current max (Ir)	10 µA
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V

Mechanical data:

Diameter	6,5 mm
Mounting	flush mountable
Housing material	POM
Assured operating distance	0...1,2 mm
Cable code designation	PUR
Repeat accuracy max. (R)	5 %
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Number of wires	3-wire
Rated operating distance (sn)	1,5 mm
Conductor cross section	3x0,073
Degree of pollution	3
Sensing face material	POM

General data:

Output indication	yes
Short circuit protected	yes
Protected against polarity reversal	yes
Approval	CE,c_ul_us
Brand	SuperShorties
Degree of protection IP	IP65

Wiring:

