


BES M08EA-NOC15B-EP02
BES026N

NPN
NC
flush mountable

CH0173a

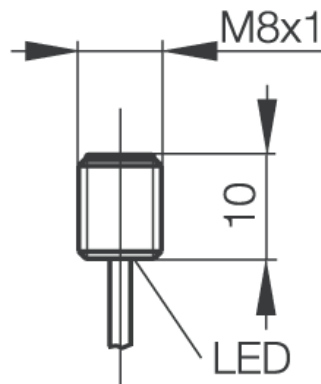

Electrical data:

Time delay before availability	20 ms
Load capacitance max	0,2 µF
No-load supply current damped	3 mA
Operating frequency (f)	3000 Hz
Voltage drop max. static	2,5 V
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	150 mA
Rated insulation voltage (Ui)	75 DC
Hysteresis max (H)	15 %
Ripple max. of Ue	10 %
Electrical type	DC
No-load supply current undamped	14 mA
Off-state current max (I _r)	10 µA
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Connection	Cable
Output resistance (R _a)	open collector
Utilization category	DC 13
Switching output	NPN
Switching element function	NC

Mechanical data:

Rated operating distance (s _n)	1,5 mm
Diameter	8 mm
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Conductor cross section	3x0,073
Mounting	flush mountable
Housing material	corrosion resistance Steel
Repeat accuracy max. (R)	5 %
Degree of pollution	3
Sensing face material	POM
Number of wires	3-wire
Assured operating distance	0...1,2 mm
Cable code designation	PUR

General data:

Protected against polarity reversal	yes
Approval	CE,c_ul_us
Brand	SuperShorties
Degree of protection IP	IP67
Output indication	yes
Short circuit protected	yes

Wiring:

