


BES M08EE-NOC15B-S04G-003
BES00C2

NPN
NC
flush mountable

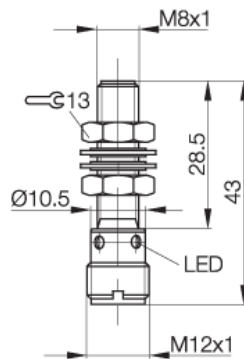

PX2007

Electrical data:

Connection	Connector S4 (M12)
Electrical type	DC
Off-state current max. (I_r)	20 μ A
Voltage drop max. static	2,5 V
Supply voltage max. (U_b)	30 V
Switching output	NPN
Switching element function	NC
Rated operational voltage (U_e)	24 DC V
Supply voltage min. (U_b)	10 V
Load current capacity (I_e)	200 mA
No-load supply current damped	= 18 mA
Operating frequency (f)	1000 Hz

Mechanical data:

Diameter	M8x1 mm
Ambient temperature min	-25 °C
Sensing face material	PA 12
Rated operating distance (sn)	1,5 mm
Assured operating distance	0...1,2 mm
Housing material	stainless steel
Mounting	flush mountable
Ambient temperature max	+70 °C

General data:

Short circuit protected	yes
Approval	CE,c_ul_us
Output indication	yes
Protected against polarity reversal	yes
Brand	GlobalProx
Degree of protection IP	IP67

Wiring:



Pinout:

