


BES M08EE-POC15B-S04G-003
BES00CA

PNP
NC
flush mountable

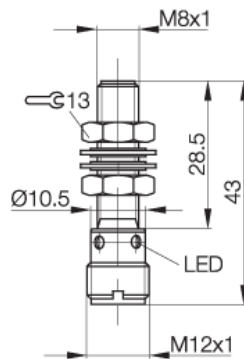

PX2007

Electrical data:

Switching output	PNP
Switching element function	NC
Rated operational voltage (Ue)	24 DC V
Supply voltage min. (Ub)	10 V
Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	9 mA
Operating frequency (f)	1000 Hz
Load current capacity (Ie)	200 mA
Off-state current max (Ir)	20 µA
Voltage drop max. static	2,5 V
Supply voltage max. (Ub)	30 V

Mechanical data:

Mounting	flush mountable
Ambient temperature min	-25 °C
Diameter	M8x1 mm
Housing material	stainless steel
Sensing face material	PA 12
Rated operating distance (sn)	1,5 mm
Assured operating distance	0...1,2 mm
Ambient temperature max	+70 °C

General data:

Short circuit protected	yes
Approval	CE,c_ul_us
Output indication	yes
Protected against polarity reversal	yes
Brand	GlobalProx
Degree of protection IP	IP67

Wiring:



Pinout:

