


BES M08EE-PSC20B-S04G-003
BES00FC

PNP
NO
flush mountable

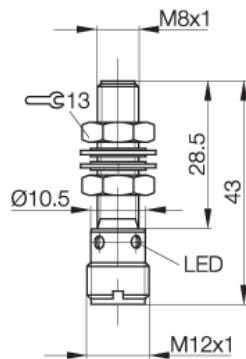

PX2007

Electrical data:

Connection	Connector S4 (M12)
Electrical type	DC
Off-state current max. (I _r)	20 µA
Voltage drop max. static	2,5 V
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Rated operational voltage (U _e)	24 DC V
Switching output	PNP
Switching element function	NO
Load current capacity (I _e)	200 mA
No-load supply current damped	9 mA
Operating frequency (f)	700 Hz

Mechanical data:

Ambient temperature max	+70 °C
Rated operating distance (s _n)	2 mm
Assured operating distance	0...1,6 mm
Housing material	stainless steel
Diameter	M8x1 mm
Ambient temperature min	-25 °C
Mounting	flush mountable
Sensing face material	PA 12

General data:

Brand	GlobalProx
Degree of protection IP	IP67
Short circuit protected	yes
Approval	CE,c_ul_us
Output indication	yes
Protected against polarity reversal	yes

Wiring:



Pinout:

