


BES M08EF-NOC15B-BP02-003
BES00CL

NPN
NC
flush mountable

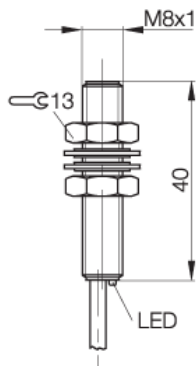

PX2576

Electrical data:

Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Off-state current max (Ir)	10 µA
No-load supply current undamped	3 mA
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V
No-load supply current damped	9 mA
Operating frequency (f)	3000 Hz
Voltage drop max. static	2,5 V
Connection	Cable
Electrical type	DC
Switching output	NPN
Switching element function	NC

Mechanical data:

Assured operating distance	0...1,2 mm
Mounting	flush mountable
Housing material	stainless steel
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Rated operating distance (sn)	1,5 mm
Diameter	M8x1 mm
Sensing face material	PA 12
Number of wires	3-wire
Cable sheath material	"PUR"

General data:

Output indication	yes
Short circuit protected	yes
Brand	GlobalProx
Degree of protection IP	IP67
Protected against polarity reversal	yes
Approval	CE,c_ul_us

Wiring:

