


BES M08EF-NSC15B-BP02-003
BES00CN

NPN
NO
flush mountable

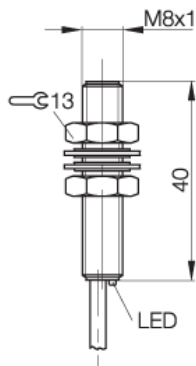

PX2576

Electrical data:

Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
No-load supply current undamped	3 mA
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V
Switching output	NPN
Switching element function	NO
Connection	Cable
Electrical type	DC
Off-state current max (Ir)	10 µA
No-load supply current damped	9 mA
Operating frequency (f)	3000 Hz
Voltage drop max. static	2,5 V

Mechanical data:

Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Number of wires	3-wire
Cable sheath material	"PUR"
Assured operating distance	0...1,2 mm
Mounting	flush mountable
Housing material	stainless steel
Rated operating distance (sn)	1,5 mm
Diameter	M8x1 mm
Sensing face material	PA 12

General data:

Output indication	yes
Short circuit protected	yes
Brand	GlobalProx
Degree of protection IP	IP67
Protected against polarity reversal	yes
Approval	CE,c_ul_us

Wiring:

