


BES M08EF-PSC15B-BP02-003
BES00CU

PNP
NO
flush mountable

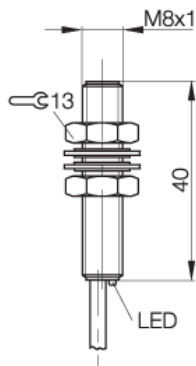

PX2576

Electrical data:

No-load supply current damped	9 mA
Operating frequency (f)	3000 Hz
Voltage drop max. static	2,5 V
Electrical type	DC
No-load supply current undamped	3 mA
Off-state current max. (I _r)	10 µA
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	10 V
Connection	Cable
Switching output	PNP
Switching element function	NO
Rated operational voltage (U _e)	24 DC V
Load current capacity (I _e)	200 mA

Mechanical data:

Rated operating distance (s _n)	1,5 mm
Diameter	M8x1 mm
Cable sheath material	"PUR"
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Number of wires	3-wire
Assured operating distance	0...1,2 mm
Mounting	flush mountable
Housing material	stainless steel
Sensing face material	PA 12

General data:

Protected against polarity reversal	yes
Approval	CE,c_ul_us
Brand	GlobalProx
Degree of protection IP	IP67
Output indication	yes
Short circuit protected	yes

Wiring:

