


BES M08MH1-NSC15B-S04G
BES0024

NPN
NO
flush mountable

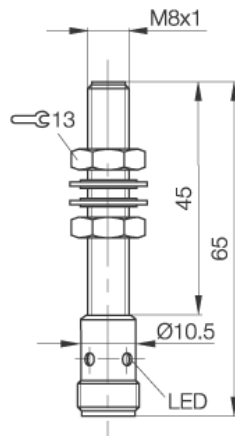

PX1576

Electrical data:

Rated operational voltage (Ue)	24 DC V
Utilization category	DC 13
Supply voltage min. (Ub)	12 V
Load current capacity (Ie)	100 mA
Off-state current max. (I _r)	20 µA
Supply voltage max. (Ub)	30 V
Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	= 12 mA
Switching output	NPN
Switching element function	NO
No-load supply current undamped	12 mA
Operating frequency (f)	600 Hz
Voltage drop max. static	3 V

Mechanical data:

Diameter	M 8 mm
Ambient temperature max	+70 °C
Rated operating distance (sn)	1,5 mm
Assured operating distance	0...1,2 mm
Housing material	CuZn, nickel plated
Repeat accuracy max. (R)	5 %
Sensing face material	PBT
Number of Wires	3-wire
Mounting	flush mountable
Ambient temperature min	-25 °C

General data:

Short circuit protected	yes
Protected against polarity reversal	yes
Brand	GlobalProx
Degree of protection IP	IP67
Approval	CE
Output indication	yes

Wiring:



Pinout:

