


BES M08MH1-POC15B-S04G
BES0026

PNP
NC
flush mountable

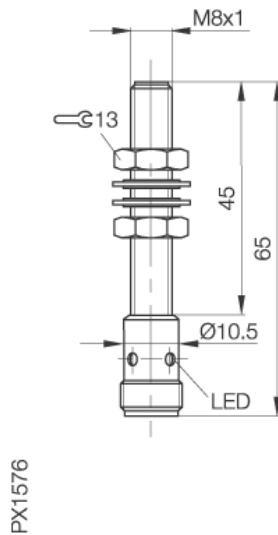

Electrical data:

Switching output	PNP
Switching element function	NC
Load current capacity (I _e)	100 mA
No-load supply current damped	= 10 mA
No-load supply current undamped	10 mA
Operating frequency (f)	1000 Hz
Voltage drop max. static	3 V
Rated operational voltage (U _e)	24 DC V
Utilization category	DC 13
Supply voltage min. (U _b)	12 V
Connection	Connector S4 (M12)
Electrical type	DC
Off-state current max (I _r)	20 µA
Supply voltage max. (U _b)	30 V

Mechanical data:

Diameter	M 8 mm
Housing material	CuZn, nickel plated
Repeat accuracy max. (R)	5 %
Number of Wires	3-wire
Sensing face material	PBT
Rated operating distance (s _n)	1,5 mm
Assured operating distance	0...1,2 mm
Ambient temperature max	+70 °C
Mounting	flush mountable
Ambient temperature min	-25 °C

General data:

Short circuit protected	yes
Approval	CE
Output indication	yes
Protected against polarity reversal	yes
Degree of protection IP	IP67
Brand	GlobalProx

Wiring:



Pinout:

