


BES M08MI-NSC15B-S04G

NPN
NO
flush mountable

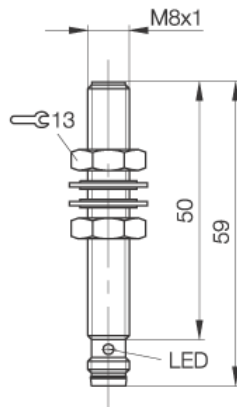

PX1546

Electrical data:

Rated operational voltage (Ue)	24 DC V
Utilization category	DC 13
Supply voltage min. (Ub)	12 V
No-load supply current undamped	12 mA
Operating frequency (f)	600 Hz
Voltage drop max. static	3 V
Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	= 12 mA
Switching output	NPN
Switching element function	NO
Load current capacity (Ie)	100 mA
Off-state current max (Ir)	20 µA
Supply voltage max. (Ub)	30 V

Mechanical data:

Rated operating distance (sn)	1,5 mm
Assured operating distance	0...1,2 mm
Ambient temperature max	+70 °C
Number of Wires	3-wire
Mounting	flush mountable
Sensing face material	PBT
Ambient temperature min	-25 °C
Diameter	M 8 mm
Housing material	CuZn, nickel plated
Repeat accuracy max. (R)	5 %

General data:

Degree of protection IP	IP67
Output indication	yes
Protected against polarity reversal	yes
Brand	GlobalProx
Short circuit protected	yes
Approval	CE

Wiring:



Pinout:

