


BES M08MI-POC15B-S49G
BES03P6

PNP
NC
flush mountable

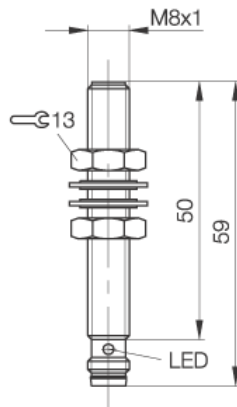

PX1546

Electrical data:

Rated operational voltage (Ue)	24 DC V
Switching output	PNP
Switching element function	NC
Utilization category	DC 13
Supply voltage min. (Ub)	12 V
Connection	Connector S49 (M8)
Electrical type	DC
No-load supply current undamped	12 mA
Off-state current max (I _r)	20 µA
Voltage drop max. static	2 V
Supply voltage max. (Ub)	30 V
Load current capacity (I _e)	100 mA
No-load supply current damped	6 mA
Operating frequency (f)	1000 Hz


Mechanical data:

Mounting	flush mountable
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Diameter	M 8 mm
Housing material	CuZn, nickel plated
Rated operating distance (sn)	1,5 mm
Assured operating distance	0...1,2 mm
Repeat accuracy max. (R)	5 %
Number of Wires	3-wire
Sensing face material	PA 12

General data:

Brand	GlobalProx
Degree of protection IP	IP67
Approval	CE,c_ul_us
Short circuit protected	yes
Output indication	yes
Protected against polarity reversal	yes

Wiring:

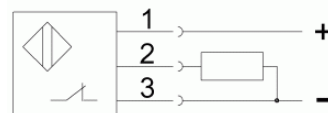

Pinout:

