


BES M08MI-PSC15B-S49G
BES003C

PNP
NO
flush mountable

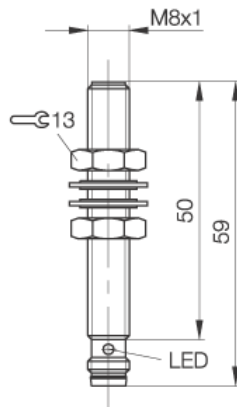

PX1546

Electrical data:

Switching output	PNP
Switching element function	NO
Rated operational voltage (Ue)	24 DC V
Utilization category	DC 13
Supply voltage min. (Ub)	12 V
Connection	Connector S49 (M8)
Electrical type	DC
No-load supply current damped	= 12 mA
No-load supply current undamped	12 mA
Operating frequency (f)	1000 Hz
Voltage drop max. static	2 V
Load current capacity (Ie)	100 mA
Off-state current max (Ir)	20 µA
Supply voltage max. (Ub)	30 V

Mechanical data:

Diameter	M 8 mm
Ambient temperature min	-25 °C
Mounting	flush mountable
Ambient temperature max	+70 °C
Number of Wires	3-wire
Sensing face material	PBT
Rated operating distance (sn)	1,5 mm
Assured operating distance	0...1,2 mm
Housing material	CuZn, nickel plated
Repeat accuracy max. (R)	5 %

General data:

Short circuit protected	yes
Approval	CE
Degree of protection IP	IP67
Output indication	yes
Protected against polarity reversal	yes
Brand	GlobalProx

Wiring:



Pinout:

