


BES M08MI-PSC20B-BP03
BES003H

PNP
NO
flush mountable

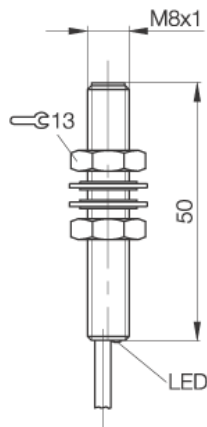

PX1571

Electrical data:

Connection	Cable
Electrical type	DC
Switching output	PNP
Switching element function	NO
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
No-load supply current undamped	10 mA
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	12 V
No-load supply current damped	= 10 mA
Operating frequency (f)	700 Hz
Voltage drop max. static	2,5 V
Utilization category	DC 13
Off-state current max (Ir)	20 µA

Mechanical data:

Number of wires	3-wire
Repeat accuracy max. (R)	5 %
Sensing face material	PA 12
Housing material	CuZn, nickel plated
Rated operating distance (sn)	2 mm
Assured operating distance	0...1,6 mm
Cable code designation	LIFY-11Y-O
Mounting	flush mountable
Diameter	M 8 mm
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C

General data:

Protected against polarity reversal	yes
Brand	GlobalProx
Degree of protection IP	IP67
Approval	CE
Output indication	yes
Short circuit protected	yes

Wiring:

