


BES M12EI-PSC40B-S04G-S
BES02NA

PNP
NO
flush mountable

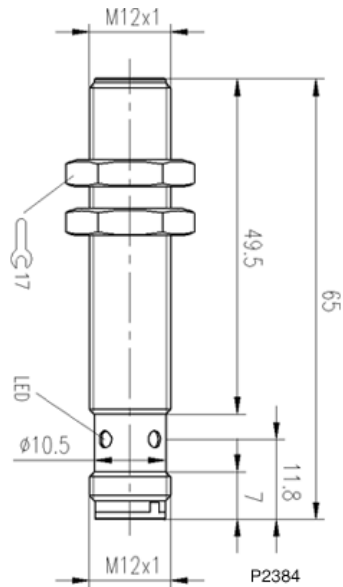

Electrical data:

Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	10 mA
Operating frequency (f)	500 Hz
Voltage drop max. static	2,5 V
Rated operational voltage (Ue)	24 DC V
Hysteresis max (H)	15 %
Switching output	PNP
Switching element function	NO
Time delay before availability	100 ms
Utilization category	DC 13
Ripple max. of Ue	10 %
Supply voltage min. (Ub)	10 V
Load current capacity (Ie)	200 mA
No-load supply current undamped	15 mA
Off-state current max (Ir)	10 µA
Supply voltage max. (Ub)	30 V

Mechanical data:

Number of Wires	3-wire
Degree of pollution	3
Sensing face material	corrosion resistance Steel
Diameter	M12x1 mm
Housing material	corrosion resistance Steel
Repeat accuracy max. (R)	5 %
Tightening torque	20 Nm
Rated operating distance (sn)	4 mm
Assured operating distance	0...3,2 mm
Ambient temperature max	+70 °C
Mounting	flush mountable
Ambient temperature min	-25 °C

General data:

Output indication	yes
Protected against polarity reversal	yes
Short circuit protected	yes
Approval	CE,c_ul_us
Brand	Steelface
Degree of protection IP	IP67

Wiring:



Pinout:

