


BES M12EI-PSC40B-S04G
BES02FU

PNP
NO
flush mountable

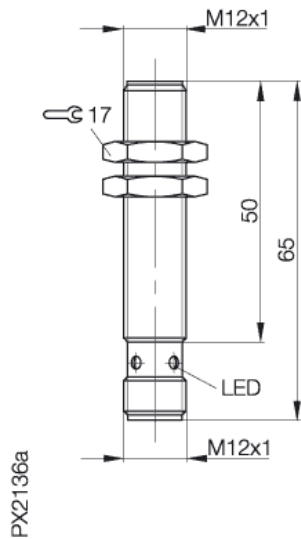

Electrical data:

Load current capacity (I _e)	200 mA
Rated insulation voltage (U _i)	250 AC
No-load supply current undamped	3 mA
Off-state current max (I _r)	10 µA
Supply voltage max. (U _b)	30 V
Rated operational voltage (U _e)	24 DC V
Load capacitance max	0,5 µF
Switching output	PNP
Switching element function	NO
Time delay before availability	20 ms
Utilization category	DC 13
Hysteresis max (H)	15 %
Ripple max. of U _e	= 15 %
Supply voltage min. (U _b)	10 V
Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	10 mA
Operating frequency (f)	1000 Hz
Voltage drop max. static	2,5 V

Mechanical data:

Tightening torque	12 / 20 Nm
Rated operating distance (s _n)	4 mm
Assured operating distance	0...3,2 mm
Ambient temperature max	+85 °C
Diameter	M12x1 mm
Temperature drift max.	10 %
Housing material	1.4404
Repeat accuracy max. (R)	5 %
Mounting	flush mountable
Ambient temperature min	-25 °C
Number of Wires	3-wire
Degree of pollution	3
Sensing face material	LCP

General data:

Brand	Proxinox
Degree of protection IP	IP68 per BWN Pr 20
Insulation class	2
Short circuit protected	yes
Protected against reversal	ja
Approval	CE, c_ul_us
Output indication	yes
Recommended connector	BKS-S20-...
Protected against polarity reversal	yes

Wiring:



Pinout:

