


BES M12ME-POC40B-S04G-003
BES00EC

PNP
NC
flush mountable

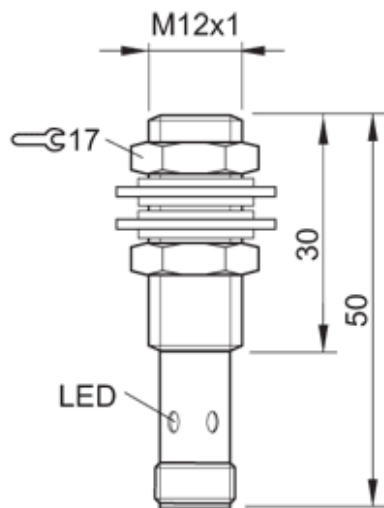

Electrical data:

Rated operational voltage (Ue)	24 DC V
Supply voltage min. (Ub)	10 V
Switching output	PNP
Switching element function	NC
Load current capacity (Ie)	130 mA
No-load supply current undamped	12 mA
Off-state current max (Ir)	80 µA
Voltage drop max. static	3,5 V
Supply voltage max. (Ub)	30 V
Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	= 25 mA
Operating frequency (f)	300 Hz

Mechanical data:

Rated operating distance (sn)	4 mm
Assured operating distance	0...3,2 mm
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Diameter	M12x1 mm
Housing material	CuZn, nickel plated
Mounting	flush mountable
Sensing face material	PA 12

General data:

Brand	GlobalProx
Degree of protection IP	IP67
Short circuit protected	yes
Approval	CE,c_ul_us
Output indication	yes
Protected against polarity reversal	yes

Wiring:



Pinout:

