


BES M12MI-POC40B-S04G
BES005N

PNP
NC
flush mountable

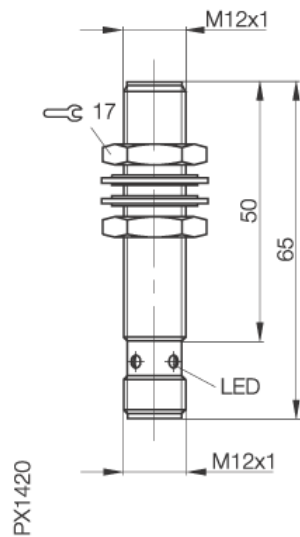

Electrical data:

Electrical type	DC
No-load supply current undamped	15 mA
Voltage drop max. static	2,5 V
Supply voltage max. (Ub)	30 V
Connection	Connector S4 (M12)
Time delay before availability	30 ms
No-load supply current damped	= 15 mA
Switching element function	NC
Operating frequency (f)	300 Hz
Off-state current max (Ir)	20 µA
Ripple max. of Ue	= 15 %
Supply voltage min. (Ub)	12 V
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Utilization category	DC 13
Hysteresis max (H)	15 %
Switching output	PNP

Mechanical data:

Number of Wires	3-wire
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Tightening torque	15 Nm
Mounting	flush mountable
Degree of pollution	3
Sensing face material	LCP
Rated operating distance (sn)	4 mm
Repeat accuracy max. (R)	5 %
Diameter	M12x1 mm
Assured operating distance	0...3,2 mm
Housing material	CuZn, nickel plated

General data:

Output indication	yes
Short circuit protected	yes
Protected against polarity reversal	yes
Degree of protection IP	IP68 per BWN Pr 20
Insulation class	2
Brand	GlobalProx
Approval	CE,c_ul_us

Wiring:



Pinout:

