


BES M18MD-POC50B-BP02-003
BES00EL

PNP
NC
flush mountable

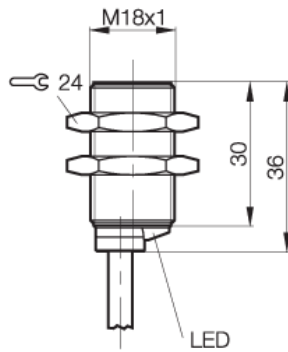

PX0143

Electrical data:

No-load supply current damped	10 mA
No-load supply current undamped	9 mA
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V
Switching output	PNP
Switching element function	NC
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Voltage drop max. static	2 V
Connection	Cable
Electrical type	DC
Off-state current max (Ir)	80 µA

Mechanical data:

Sensing face material	PBTP
Number of wires	3-wire
Assured operating distance	0...4,1 mm
Cable sheath material	"PUR"
Rated operating distance (sn)	5 mm
Diameter	M18x1 mm
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Mounting	flush mountable
Housing material	CuZn, nickel plated

General data:

Brand	GlobalProx
Degree of protection IP	IP67
Protected against polarity reversal	yes
Approval	CE,c_ul_us
Output indication	yes
Short circuit protected	yes

Wiring:

