


BES M18MF-PSC50A-S04G
BES01R3

PNP
NO
flush mountable

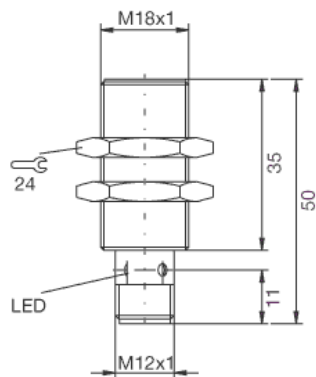

PX1622

Electrical data:

Rated operational voltage (Ue)	24 DC V
Operating frequency (f)	2500 Hz
Voltage drop max. static	2,5 V
Load current capacity (Ie)	200 mA
Off-state current max (Ir)	80 µA
Supply voltage max. (Ub)	30 V
Time delay before availability	15 ms
Utilization category	DC 13
Hysteresis max (H)	15 %
Ripple max. of Ue	= 10 %
Supply voltage min. (Ub)	10 V
Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	= 15 mA
Switching output	PNP
Switching element function	NO

Mechanical data:

Number of Wires	3-wire
Housing material	CuZn, nickel plated
Repeat accuracy max. (R)	5 %
Rated operating distance (sn)	5 mm
Assured operating distance	0...4,0 mm
Mounting	flush mountable
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Diameter	M18x1 mm
Degree of pollution	3
Sensing face material	LCP + PTFE

General data:

Short circuit protected	yes
Protected against polarity reversal	yes
Output indication	yes
Brand	Factor 1
Degree of protection IP	IP67
Approval	CE, ULZ1
Features	Factor 1

Wiring:



Pinout:

