


BES M18MG-POC16F-BV02
BES006U

PNP
NC
non flush mountable

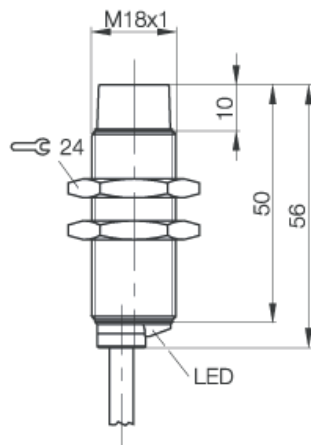

PX2233b

Electrical data:

Connection	Cable
Output resistance (Ra)	33k + D
Electrical type	DC
Off-state current max (Ir)	10 µA
Ripple max. of Ue	15 %
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Utilization category	DC 13
Switching output	PNP
Switching element function	NC
Time delay before availability	20 ms
Load capacitance max	0,5 µF
No-load supply current damped	3 mA
Operating frequency (f)	800 Hz
Voltage drop max. static	2,5 V
Rated insulation voltage (Ui)	250 AC
Hysteresis max (H)	20 %
No-load supply current undamped	10 mA
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V

Mechanical data:

Tightening torque	25 Nm
Assured operating distance	0...13 mm
Cable code designation	LiYY-O
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Number of wires	3-wire
Mounting	non flush mountable
Housing material	CuZn, Ni free coated
Repeat accuracy max. (R)	5 %
Rated operating distance (sn)	16 mm
Diameter	M18x1 mm
Degree of pollution	3
Sensing face material	PBT

General data:

Brand	GlobalProx
Degree of protection IP	IP67
Insulation class	2
Protected against polarity reversal	yes
Output indication	yes
Short circuit protected	yes
Approval	CE,c_ul_us

Wiring:

