


BES M18MI-POC50B-BP03
BES007P

PNP
NC
flush mountable

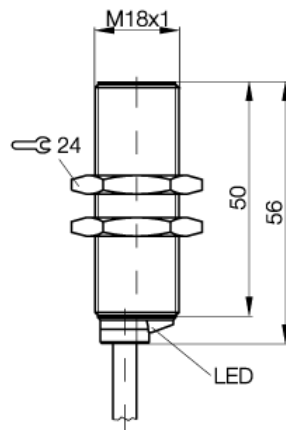

PX0268

Electrical data:

Time delay before availability	30 ms
No-load supply current damped	6 mA
Operating frequency (f)	700 Hz
Voltage drop max. static	2,5 V
Connection	Cable
Electrical type	DC
Switching output	PNP
Switching element function	NC
Rated operational voltage (Ue)	24 DC V
Load current capacity (Ie)	200 mA
Utilization category	DC 13
Off-state current max (Ir)	20 µA
Ripple max. of Ue	15 %
Hysteresis max (H)	15 %
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	12 V

Mechanical data:

Tightening torque	35 Nm
Rated operating distance (sn)	5 mm
Degree of pollution	3
Sensing face material	PA 12
Housing material	CuZn, nickel plated
Number of wires	3-wire
Mounting	flush mountable
Diameter	M18x1 mm
Assured operating distance	0...4,0 mm
Cable code designation	LIYY-0
Repeat accuracy max. (R)	5 %
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C

General data:

Insulation class	2
Protected against polarity reversal	yes
Output indication	yes
Short circuit protected	yes
Approval	CE,c_ul_us
Brand	GlobalProx

Wiring:

