


BES M18MI-POC50B-BV02
BES007T

PNP
NC
flush mountable

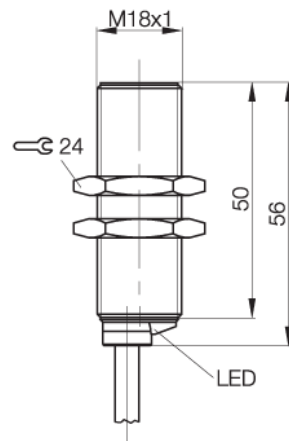

PX0268a

Electrical data:

Connection	Cable
Off-state current max. (I _r)	20 µA
Rated operational voltage (U _e)	24 DC V
Load current capacity (I _e)	200 mA
No-load supply current undamped	8 mA
Supply voltage max. (U _b)	30 V
Supply voltage min. (U _b)	12 V
Electrical type	DC
Switching output	PNP
Switching element function	NC
No-load supply current damped	15 mA
Operating frequency (f)	700 Hz
Voltage drop max. static	2,5 V

Mechanical data:

Mounting	flush mountable
Housing material	CuZn, nickel plated
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C
Rated operating distance (s _n)	5 mm
Diameter	M18x1 mm
Sensing face material	PA 12
Number of wires	3-wire
Assured operating distance	0...4,1 mm
Cable sheath material	"PVC"

General data:

Output indication	yes
Short circuit protected	yes
Brand	GlobalProx
Degree of protection IP	IP68 per BWN Pr 20
Protected against polarity reversal	yes
Approval	CE,c_ul_us

Wiring:

