


BES M30MM-POC30F-S04K
BES00AU

PNP
NC
non flush mountable

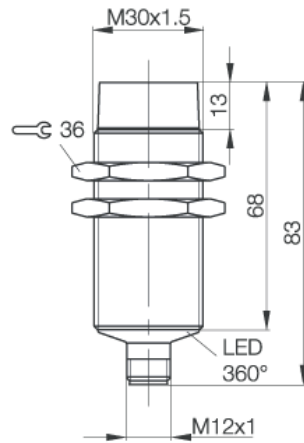

PX2226

Electrical data:

Load current capacity (I _e)	200 mA
Hysteresis max (H)	20 %
Load capacitance max	0,5 µF
Switching output	PNP
Switching element function	NC
Time delay before availability	20 ms
No-load supply current undamped	10 mA
Off-state current max (I _r)	10 µA
Operating frequency (f)	300 Hz
Voltage drop max. static	2,5 V
Rated operational voltage (U _e)	24 DC V
Utilization category	DC 13
Ripple max. of U _e	= 15 %
Supply voltage min. (U _b)	10 V
Connection	Connector S4 (M12)
Electrical type	DC
No-load supply current damped	3 mA
Supply voltage max. (U _b)	30 V

Mechanical data:

Mounting	non flush mountable
Degree of pollution	3
Sensing face material	PBT
Number of Wires	3-wire
Ambient temperature max	+70 °C
Tightening torque	70 Nm
Rated operating distance (sn)	30 mm
Assured operating distance	0...24 mm
Housing material	CuZn, Ni free coated
Repeat accuracy max. (R)	5 %
Diameter	M30x1.5 mm
Ambient temperature min	-25 °C

General data:

Output indication	yes
Protected against polarity reversal	yes
Brand	GlobalProx
Degree of protection IP	IP67
Short circuit protected	yes
Approval	CE, c_ul_us
Insulation class	2

Wiring:



Pinout:

