


PNP
NC
flush mountable

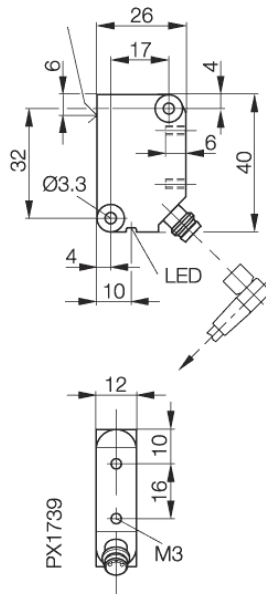

General data:

Degree of protection IP	IP67
Short circuit protected	yes
Approval	CE,c_ul_us
Output indication	yes
Protected against polarity reversal	yes

Pinout:



PA

Housing material	PA
Repeat accuracy max. (R)	5 %
Ambient temperature max	+70 °C
Tightening torque	0.25 Nm
Rated operating distance (sn)	4 mm
Assured operating distance	0...3,2 mm
Ambient temperature min	-25 °C
Number of Wires	3-wire
Mounting	flush mountable
Degree of pollution	3
Sensing face material	PA