


BES R05KB-PSC20B-EP02
BES01Z4

PNP
NO
flush mountable

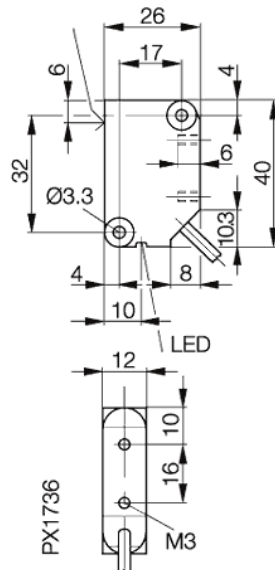

Electrical data:

Connection	Cable
Switching output	PNP
Switching element function	NO
Rated insulation voltage (Ui)	250 V AC
No-load supply current damped	9 mA
Supply voltage max. (Ub)	30 V
Supply voltage min. (Ub)	10 V
Utilization category	DC 13
Load current capacity (Ie)	200 mA
Operating frequency (f)	400 Hz
Voltage drop max. static	2,5 V

Mechanical data:

Number of wires	3-wire
Cable code designation	PUR
Repeat accuracy max. (R)	5 %
Sensing face material	PA 12
Mounting	flush mountable
Housing material	PA 12
Ambient temperature max	+70 °C
Ambient temperature min	-25 °C

General data:

Power Indication	no
Approval	CE,c_ul_us
Degree of protection IP	IP67
Output indication	yes
Short circuit protected	yes
Insulation class	2

Additional information:

When overload is removed, interrupt power supply for 2s.

Wiring:

