


BHS G403N-PSD10-S26
BHS006N

PNP
NO
flush mountable

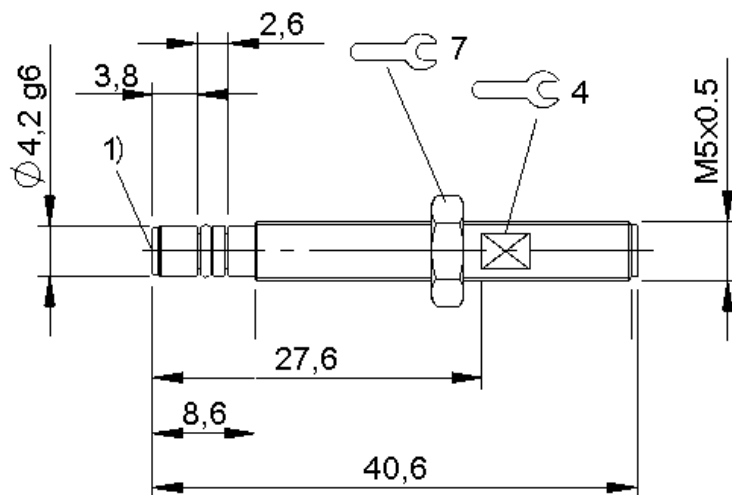


Electrical data:

Utilization category	DC 13
Ripple max. of Ue	10 %
Supply voltage min. (Ub)	10 V
Connection	Connector S26 (M5)
Electrical type	DC
Load capacitance max	0,4 µF
No-load supply current damped	10 mA
Switching output	PNP
Switching element function	NO
Time delay before availability	25 ms
Hysteresis max (H)	15 %
Operating frequency (f)	3000 Hz
Load current capacity (Ie)	100 mA
No-load supply current undamped	7 mA
Off-state current max (Ir)	100 µA
Voltage drop max. static	2,5 V
Supply voltage max. (Ub)	30 V

General data:

Output indication	no
Recommended connector	BCC00HP
Protected against polarity reversal	yes
Short circuit protected	yes
Power Indication	no
Degree of protection IP	IP68 per BWN Pr 20
Approval	CE
Features	pressure rated to 350 bar

Wiring:



Pinout:



Mechanical data:

Diameter	M5x0,5 mm
Housing material	1.4104
Mounting	flush mountable
Degree of pollution	3
Sensing face material	ZrO2
Number of Wires	3-wire
Ambient temperature max	+80 °C
Ambient temperature min	-25 °C
Tightening torque	1 Nm
Rated operating distance (sn)	1 mm
Assured operating distance	0...0,8 mm
Temperature drift max.	10 %
Repeat accuracy max. (R)	10 %